


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H01S 3/30</b>	<b>A1</b>	(11) International Publication Number: <b>WO 96/37936</b> (43) International Publication Date: 28 November 1996 (28.11.96)
<p>(21) International Application Number: PCT/GB96/01218</p> <p>(22) International Filing Date: 21 May 1996 (21.05.96)</p> <p>(30) Priority Data: 9510742.1 26 May 1995 (26.05.95) GB</p> <p>(71) Applicant (for all designated States except US): IMPERIAL COLLEGE OF SCIENCE, TECHNOLOGY &amp; MEDICINE [GB/GB]; Exhibition Road, London WW7 2AZ (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): TAYLOR, James, Roy [GB/GB]; 13 Lynton Road, Queen's Park, London NW6 6BD (GB). CHERNIKOV, Stanislav Viktorovich [RU/GB]; 28 Merton Hall Gardens, Wimbledon, London SW20 8SN (GB). GAPONTSEV, Valentin Pavlovich [RU/RU]; IRE Polus, 1 Vvedenskogo Square, Fryazino, Moscow, 141120 (RU).</p> <p>(74) Agents: MAGGS, Michael, Norman et al.; Kilburn &amp; Strobe, 30 John Street, London WC1N 2DD (GB).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report.</p>

(54) Title: A RESONANT CASCADE-RAMAN RADIATION SOURCE

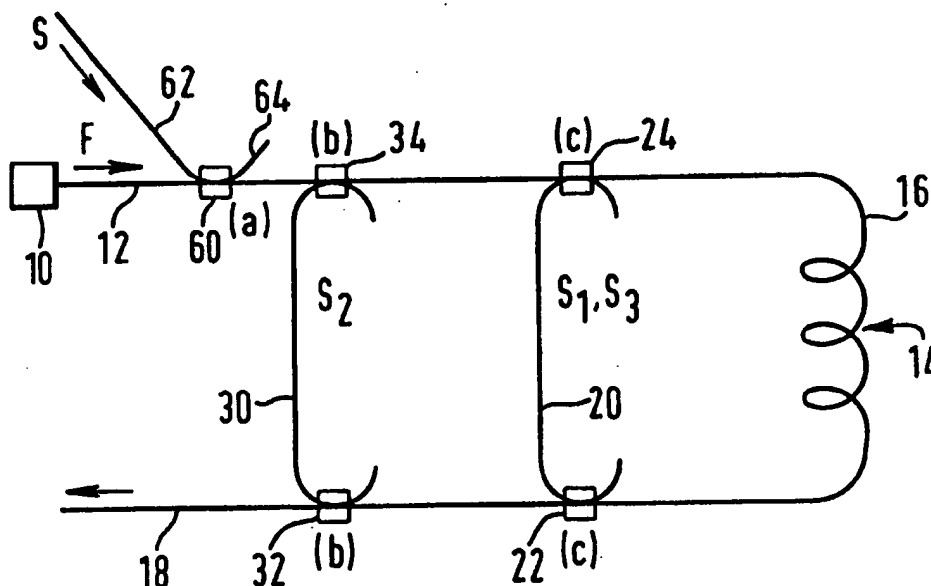

(57) Abstract

A resonant cascade-Raman radiation source comprises a long optical fibre which is adapted for producing Raman radiation when pump radiation is passed along it. One or more additional optical fibres are coupled across the main optical fibre to produce individual optical resonator circuits each of which resonates at a particular Stokes frequency. Cascaded Raman scattering occurs within the device, allowing access to higher Stokes components via suitably-positioned optical coupler within one of the loops. In one embodiment, the device acts as an optical amplifier, and in another it acts as an efficient radiation source (laser). Applications include optical telecommunications and remote sensing, including pollution monitoring.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

### A Resonant Cascade-Raman Radiation Source

The invention relates to a resonant cascade-Raman radiation source.

5 Much work has been done on Raman radiation over the years. When a laser is used to produce an optical signal through an optical fibre a cascade at varying frequencies is created. Under normal circumstances, this radiation naturally dies off. However, it has been noted that in an appropriate resonator the first frequency (known as  
10 the first Stokes component) may build up enough to stimulate further Raman scattering in its own right, thereby creating a second Stokes component. That component may itself undergo Raman scattering to produce a third Stokes component, and so on. Although it has  
15 long been realised that access to second and higher order Stokes components would be a desirable aim, there is no current device which provides such access at anything like commercially-useful efficiency.

Although not for the same purpose as the present  
20 invention, a device making use of Raman scattering processes is shown in EP-A-0286338.

It is an object of the present invention to provide a high efficiency source of optical radiation. It is a further object to provide a source of radiation at  
25 wavelengths which otherwise may be difficult to achieve using other means.

According to a first aspect of the present invention there is provided a resonant stimulated cascade-Raman radiation source comprising an optical pump an output of  
30 which is coupled into a main waveguide having a Raman scattering portion within which the pump output is scattered to generate a first Stokes component, a first re-entrant waveguide portion which forms, with the Raman scattering portion, a first re-entrant loop within which

the first Stokes component resonates, the first Stokes component itself being Raman scattered within the Raman scattering portion to generate a second Stokes component, and a first coupler within the loop for coupling out the second Stokes component.

According to a second aspect of the present invention there is provided a resonant cascade-Raman radiation source comprising an optical pump which is coupled into a main waveguide having a Raman scattering portion; a plurality of re-entrant waveguide portions each of which, together with the Raman scattering portion, defines a separate re-entrant resonant loop, the loops together forming a cascade-Raman resonant array; and coupling means for coupling out of the array an optical output of a required frequency.

A device constructed in accordance with the present invention provides a high-gain high-efficiency radiation source (laser) based upon the stimulated Raman scattering process. One advantage of this source is that it may be based upon standard fibre optical components which may be readily configured to allow efficient operation. The device may also be widely wavelength tunable. In the preferred configuration, cascaded intracavity Raman generation is employed in an resonant configuration which significantly decreases the threshold for stimulated scattering and increases the efficiency of energy transfer from the pump into the higher Raman Stokes (longer wavelength) components, leading to highly efficient operation.

A device of the present invention may be used as a radiation source, at a desired frequency, or alternatively as a radiation/optical amplifier. In either case, the device may be operated either in a pulsed mode or in a continuous wave mode.

The device has applications in optical telecommunications technology, and in remote sensing applications, for example pollution monitoring. In the former case, the device may be operated broadly around 1.48 $\mu$ m for remote pumping of Er-based optical amplifiers in the third telecommunications window, tunable around 1.55 $\mu$ m; or at around 1.3 $\mu$ m for optical amplification. In the second case, the device may be operated in the 2 - 3 $\mu$ m region.

10 The present invention may be carried into practice in a number of ways and two specific embodiments will now be described, by way of example, with reference to the accompanying drawings, in which:

15 Figure 1 shows in schematic form a resonant cascade-Raman radiation source according to a first embodiment of the present invention;

Figure 2 shows a variation of the source shown in Figure 1 which is adapted to act as an optical amplifier; and

20 Figure 3 illustrates the transmission functions of the couplers shown in Figures 1 and 2.

Figure 1 shows, in schematic form, a resonant cascade-Raman radiation source according to a first embodiment of the present invention.

25 The device includes an optical pump 10 producing a pump output at a frequency F, the output being coupled into the input end 12 of a main optical fibre 14. The fibre has a central Raman scattering portion 16, of a length optimised for operational pump power and wavelength requirement (typically 1 - 3km), and an output portion 18.

30 Linked between opposite ends of the Raman scattering portion 16 is a first additional optical fibre 20. This is optically coupled to the main fibre 14 by first and

second wavelength division multiplexed (WDM) fused fibre couplers 22,24. Within each coupler, the respective fibres are brought closely together, and are fused in a position adjacent to one another, so that optical coupling may occur between the cores of the fibres. This is established and well-known technology. The ends 26,28 of the additional fibre 20 are simply cut short. no special termination is required.

In a similar way, there is also a second additional fibre 30 which is coupled to the main fibre 14 by third and fourth WDM fused fibre couplers 32,34. Again, the ends 36,38 of the fibre 30 are simply cut off.

Operation of the device relies upon Raman scattering occurring in the Raman scattering portion 16 of the main fibre 14. To that end, the fibre 14 needs to be chosen according to the power and/or wavelength of the optical output of the source 10. Depending on the power and on the wavelength, the fibre 14 may be a silica glass fibre, or alternatively a fluoride glass fibre. Other types of doping, such as phosphorous, germanium or boron may be used in appropriate circumstances.

The couplers 22,24,32,34 are of two different types, labelled (b) and (c) in the drawing. The transmission properties of the couplers are shown in Figure 3, in which transmissivity is plotted as a function of wavelength. In Figure 3, and in the description that follows,  $F$  represents the pump frequency, and  $S_1$ ,  $S_2$ ,  $S_3$  and  $S_4$  represent respectively the first to fourth Stokes lines which are generated within the Raman scattering portion 16.

The operation of the device of Figure 1 will now be described. Since both the couplers 24 and 33 are transmissive to radiation of frequency  $F$ , the pump radiation passes through to the Raman scattering portion

16. Within that portion, stimulated Raman scattering occurs and a first Stokes component is generated, of frequency  $S_1$ . As will be seen in Figure 3, the coupler 22 has zero transmissivity at frequency  $S_1$ , and the first Stokes component is accordingly diverted or "reflected" into the first additional optical fibre 20. This can in effect be the arms of the couplers 22,24. Since the coupler 24 also has zero transmissivity to the  $S_1$  component, that component is again reflected at the coupler 24 away from the cut end 26 and back into the loop. Losses within the loop at the frequency  $S_1$  are small, and resonance occurs. The intensity of  $S_1$  accordingly builds up until it is large enough to undergo Raman scattering itself within the Raman scattering portion 16. A second Raman component  $S_2$  is accordingly generated.

When light of frequency  $S_2$  reaches the coupler 22 it passes straight through to the optical coupler 32. This coupler is of the second type, type (b), and it has zero transmissivity at  $S_2$  frequency. The  $S_2$  component is therefore redirected or "reflected" into the second additional optical fibre 30. At the coupler 34 the  $S_2$  component is again reflected away from the cut end 38 back into the main fibre 14. The path is repeated, and light at frequency  $S_2$  accordingly resonates within the loop including the Raman scattering portion 16 of the main optical fibre, and the second additional optical fibre 30. Once the intensity of the  $S_2$  has been built up sufficiently, further Raman scattering will occur in the Raman scattering portion 16, thereby generating a third Raman component  $S_3$ .

The  $S_3$  component is not transmitted by the coupler 22, and accordingly is reflected into the first additional optical fibre 20. At the other end of that

fibre, the component is reflected away from the cut end  
26 back into the loop. Resonance at the third Stokes  
frequency  $S_3$  accordingly builds up in the loop including  
the Raman scattering portion 16 and the first additional  
5 optical fibre 20.

The resonating component  $S_3$  is further scattered in  
the Raman scattering portion 16 to generate a fourth  
Raman component  $S_4$ . As may be seen in Figure 3, both the  
coupler 28 and the coupler 36 transmit at the  $S_4$   
10 frequency, allowing the fourth Stokes component to exit  
the device along the output portion 18 of the line.

It will be appreciated that Figure 1 merely  
illustrates the general principles of the device, and  
that additional stages could be incorporated to allow  
15 access to higher Stokes orders. It is well within the  
capabilities of a person skilled in the art to create WDM  
fused fibre couplers having appropriate transmissivity  
characteristics to access whichever Stokes component is  
required. Additional couplers (not shown) may be  
20 provided as required to couple out whichever Stokes  
frequencies are needed. Naturally, if a large proportion  
of any given Stokes component is extracted from the  
resonant system, further cascading will not take place.  
However, by designing appropriate couplers only a limited  
25 proportion of any required Stokes component need be  
extracted, providing the possibility of leaving enough of  
that component within the resonating system to stimulate  
further cascades. In this way, several different Stokes  
components could be accessed at once.

30 The system shown in Figure 1 provides access to  
Stokes components  $S_2$ ,  $S_3$  and  $S_4$  at very low pump powers.

Although the above description has focused on light  
travelling around the re-entrant loops in a clockwise  
direction, it should be understood that because resonance



has built up in each of the loops, the loops are essentially bi-directional, and it would be equally valid to talk of the light travelling in the opposite direction (at least for the continuous wave case; not so for pulsed light).

Figure 2 shows an alternative embodiment, in which the device is arranged as an optical amplifier for amplifying an input signal S. The signal S should lie within the Raman scatter provided by the pump; this need not be very close: as an example, for silica fibre the peak of Raman gain is approximately 440 wavenumbers from the pump line. The signal S arrives along an input signal optical fibre 62, which is coupled into the main optical fibre 14 via an input WDM fused fibre coupler 60. This coupler is of type (a) and has the transmissivity function shown by the correspondingly labelled line in Figure 3. The end portion 64 of the signal input optical fibre 62 is simply cut off.

Such an arrangement allows amplification of the signal S by means of a conveniently-available pump frequency F. By appropriate selection of the properties of the main optical fibre, the Raman shifts may be adjusted so that the output frequency along the output portion 18 corresponds with the frequency S. The input signal S is chosen such that it will lie within the gain band width of one of the Stokes components. This allows one to select a pump source 10 which is cheap and readily available.

In the example of Figure 2,  $S_4$  will transmit through the system to the output line 18.  $S_4$  is also the frequency of the signal S which is input along the line 62. In the Raman active medium 16 the fundamental F will generate  $S_1$ , which will in turn cascade to  $S_2$  and  $S_3$ . The  $S_3$  will act as a pump for the  $S_4$  which is of course the

low level signal to be amplified. Accordingly, the device effectively acts as a single path amplifier for the signal S, with the resonator simply providing sufficient pump radiation at S, for the amplification to occur.

In effect, therefore, the amplifier is a simple single pass amplifier, with the signal passing through the pump once and receiving gain as it does so. The pump radiation F is used up in amplifying the signal.

It will be appreciated that both in Figure 1 and in Figure 2, the pump frequency F is transmitted by all of the couplers. It may therefore appear on the output fibre 18, and if necessary another WDM filter may be placed on the output line to remove the pump radiation from the required output signal. Clearly, however, if the Raman gain fibre is correctly chosen, the cascade process will transfer with very high efficiency pump power to the Raman orders. This should mean that all or substantially all of the pump radiation is used up in the cascade process.

The system shown in Figure 2 is tunable in that the Raman gain band width is several hundred wavenumbers wide (a wavenumber being one inverse centimetre). Any signal S lying within the gain bandwidths will be amplified. Therefore, it is possible to input a signal wavelength which is tunable, and it will receive gain. The only requirement is that the signal lies within the Raman gain line width. If the input signal wavelength is tuned, the output will follow accordingly and will be amplified. However, tunability may be limited by the actual WDM filters used, and this has to be taken into account when designing the system. Any of the Stokes bands may be accessed, and all of them provide wide tunability.

There are numerous commercial applications for devices manufactured in accordance with the present invention. A first commercial application relates to remote sensing, for example for the detection of gas or air pollution. Gases have a specific vibration and certain gases produce fingerprint vibrations when irradiated with infra-red radiation. Typically, radiation within the 2 - 3 $\mu$ m range could be used, provided by a device as previously described, using a fibre optimised for operation in this wavelength regime. Currently, there are no similar small tunable laser sources for wavelengths within this range. A device of this type could also be used to study back scatter from the atmosphere.

A further application exists in the telecommunications field, where erbium amplifiers are used to boost signals within very long runs of optical fibres, for example runs of greater than around 500 to 1000 km. A device of the type described above may be used to provide remote pumping at about 1.5  $\mu$ m, thereby avoiding the necessity of putting amplifiers and associated electronics under water. The pump energy could either be supplied along the signal line, or along a separate dedicated optical fibre. In this way, a resonant system source, operating at say 1W or substantially above, could act as a continuous wave remote pump.

A third application, again in the telecommunications field, is as an optical signal amplifier operating at around 1.3 $\mu$ m. This would remove the necessity for optical signal regeneration at around 40km intervals, and it is applicable to the majority of currently - installed terrestrial systems. A device such as is illustrated in

Figure 2 would permit all-optical transmission without having to convert back to electrical signals at intervals.

**CLAIMS:**

1. A resonant stimulated cascade-Raman radiation source comprising an optical pump an output of which is coupled  
5 into a main waveguide having a Raman scattering portion within which the pump output is scattered to generate a first Stokes component, a first re-entrant waveguide portion which forms, with the Raman scattering portion, a first re-entrant loop within which the first Stokes  
10 component resonates, the first Stokes component itself being Raman scattered within the Raman scattering portion to generate a second Stokes component, and a first coupler within the loop for coupling out the second Stokes component.  
15
2. A radiation source as claimed in Claim 1 in which the first re-entrant waveguide portion comprises a separate waveguide which is coupled to opposite ends of the Raman scattering portion of the main waveguide by the  
20 first coupler and a second coupler.
3. A radiation source as claimed in Claim 2 in which the first coupler couples the second Stokes component out of the first re-entrant loop into an output portion of  
25 the main waveguide.
4. A radiation source as claimed in Claim 1 in which the first re-entrant waveguide portion comprises a re-entrant portion of the main waveguide which is coupled  
30 back to an end of the Raman scattering portion by a second coupler.
5. A radiation source as claimed in Claim 4 in which the first coupler is positioned between the Raman

scattering portion of the main waveguide and the re-entrant portion, and couples the second Stokes component out into a separate output waveguide.

- 5        6.    A radiation source as claimed in any one of Claims 1 to 5, including a second re-entrant waveguide portion which forms, with the Raman scattering portion, a second re-entrant loop.
- 10       7.    A radiation source as claimed in Claim 6 in which the second Stokes component resonates within the second re-entrant loop.
- 15       8.    A radiation source as claimed in Claim 7 in which the second Stokes component is scattered within the Raman scattering portion to generate a third Stokes component.
- 20       9.    A radiation source as claimed in Claim 8 in which the third Stokes component resonates within the first re-entrant loop, the third Stokes component being scattered within the Raman scattering portion to generate a fourth Stokes component, the fourth Stokes component being then coupled out of the second re-entrant loop.
- 25       10.   A radiation source as claimed in any one of Claims 6 to 9 including third and fourth couplers coupling the second re-entrant portion to the main waveguide at opposite ends of the Raman scattering portion.
- 30       11.   A radiation source as claimed in Claim 1 including a plurality of re-entrant waveguide portions each of which forms, with the Raman scattering portion, a separate re-entrant loop, and an output coupler for coupling out of one of the loops an optical output of a

required frequency.

12. A radiation source as claimed in any one of Claims 1 to 11 in which the main waveguide is an optical fibre.
- 5 13. A radiation source as claimed in Claim 12 in which the optical fibre is a silica glass fibre.
14. A radiation source as claimed in Claim 12 in which  
10 the optical fibre is a fluoride glass fibre.
15. A radiation source as claimed in Claim 12 in which the or each coupler is a fused-fibre coupler.
- 15 16. A radiation source as claimed in Claim 12 in which the optical fibre is doped with germanium, phosphorous or boron.
17. A radiation source as claimed in any one of Claims  
20 1 to 16 in which the source is pulsed.
18. A radiation source as claimed in any one of Claims 1 to 16 in which the source is continuous-wave.
- 25 19. A radiation source as claimed in any one of Claims 1 to 16 including an input coupler for coupling into the Raman scattering portion the pump output and an input signal to be amplified.
- 30 20. A resonant stimulated cascade-Raman radiation source comprising an optical pump which is coupled into a main waveguide having a Raman scattering portion; a plurality of re-entrant waveguide portions each of which, together with the Raman scattering portion, defines a separate re-

entrant resonant loop, the loops together forming a cascade-Raman resonant array; and coupling means for coupling out of the array an optical output of a required frequency.



1 / 2

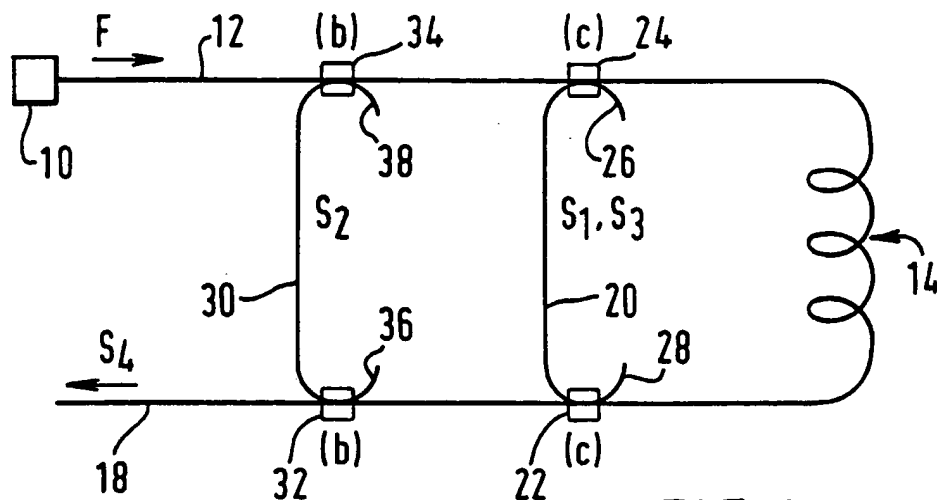


FIG. 1

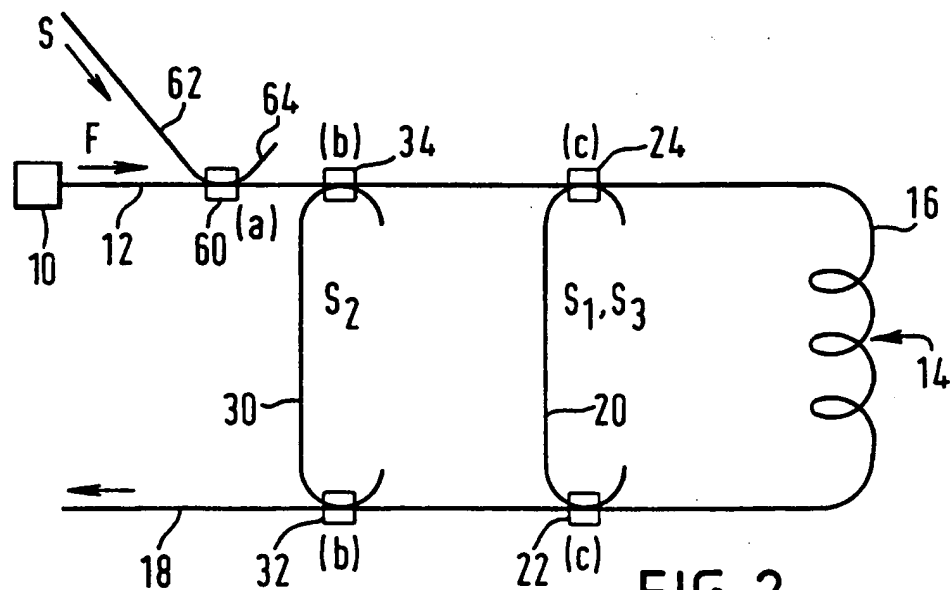


FIG. 2

2 / 2

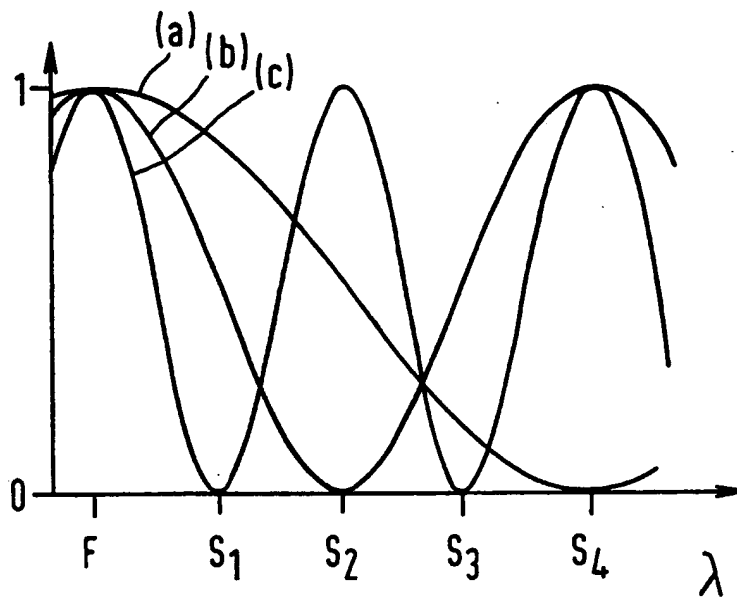


FIG. 3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 96/01218

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H01S3/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ELECTRONICS LETTERS, 16 MARCH 1995, UK, vol. 31, no. 6, ISSN 0013-5194, pages 472-473, XP000530327 CHERNIKOV S V ET AL: "High-gain, monolithic, cascaded fibre Raman amplifier operating at 1.3 $\mu$ m" see the whole document ---	1-20
A	US,A,5 323 404 (GRUBB STEPHEN G) 21 June 1994 see figures 1,4 ---	1
A	EP,A,0 286 338 (BRITISH TELECOMM) 12 October 1988 cited in the application see abstract -----	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

27 August 1996

Date of mailing of the international search report

04.09.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Galanti, M

# INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No

PCT/GB 96/01218

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5323404	21-06-94	EP-A- 0651479 JP-A- 7181529	03-05-95 21-07-95
EP-A-0286338	12-10-88	AU-B- 591591 AU-B- 1492688 DE-A- 3880729 WO-A- 8808150 JP-T- 1503570 US-A- 4958910	07-12-89 04-11-88 09-06-93 20-10-88 30-11-89 25-09-90